

BISCUIT BELT

RFQ / APPLICATION SHEET

Purpose: Please complete the fields below so YIYI Engineering can confirm the correct Biscuit Belt specification. This sheet is for baking-line belts. Leave unknown values blank — our engineering team will follow up. For replacement orders, please attach photos or drawings of the existing belt and sprockets.

01 CUSTOMER & PROJECT INFORMATION

Company Name		Date	
Contact Person		Title / Department	
Email		Phone / WhatsApp	
Country & City		End User / Plant Location	
Project Type		☐ New belt for new system ☐ Replacement belt ☐ Spare / stock belt	
Original Brand / Part No.		If replacement	
Sample / Drawing Available?		☐ Yes — will send photo / sample ☐ Drawing available ☐ No reference	

02 SYSTEM OVERVIEW

Parameter	Unit	Value / Selection	Parameter	Unit	Value / Selection
Oven / Equipment Brand			Oven Model / Type		
Application / Process		☐ Biscuit / Cookie / Cracker baking ☐ Wafer ☐ Cooling ☐ Other: _____			
Total Belt Length	m		Number of Belt Passes		
Belt Speed	m/min				
Heat Source		☐ Direct gas-fired ☐ Indirect gas ☐ Electric ☐ Combination			

03 BELT SPECIFICATION

Parameter	Unit	Value / Selection	Parameter	Unit	Value / Selection
Belt Type		☐ Flat wire biscuit belt ☐ Z47-type ☐ Other: _____			
Material		☐ SUS304 (Standard) ☐ SUS316 ☐ SUS310 (high-temp) ☐ Other: _____			
O/A Width	mm		Useful Width	mm	
Flat Wire Height	mm	e.g. 4 / 5 / 6	Flat Wire Thickness	mm	e.g. 1.0 / 1.2 / 1.4
Rod Pitch	mm	e.g. 12 / 16 / 20	Rod Diameter	mm	e.g. 2.5 / 3.0 / 4.0
Mesh Opening	mm				
Edge Treatment		☐ Flat Headed Welded ☐ Button Welded ☐ Other: _____			
Surface Treatment		☐ Pickling (Standard) ☐ Polished ☐ Other: _____			
Quantity Required	m				
Drive Details					
Sprocket / Drive Drum Diameter	mm	⚠ Required for replacement orders			
Sprocket Part No. (if known)					

Note: For applicable projects, YIYI reviews sprocket and drum dimensions before production.


04 APPLICATION & OPERATING CONDITIONS

Parameter	Unit	Value / Selection	Parameter	Unit	Value / Selection
Product Being Baked		e.g. Cream cracker / Rich tea / Digestive / Cookie / Wafer			
Min. Operating Temperature	°C		Max. Operating Temperature	°C	e.g. +250°C for tunnel ovens
Product Thickness	mm		Product Weight	kg/m²	
Product Sticks to Belt?		☐ Yes — release agent used ☐ No ☐ Unknown			

05 DELIVERY REQUIREMENTS

Required Delivery Date	Port of Destination
Trade Terms (FOB / CIF / EXW)	Payment Terms

06 REFERENCE DIAGRAM

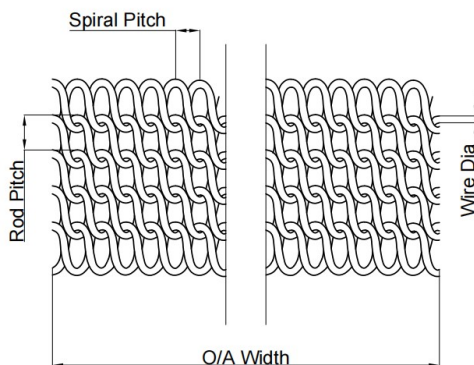

07 REMARKS & ATTACHMENTS

Additional Notes / Special Requirements

Reference Drawing / Photo

Attach photos of the existing belt, drive components and any drawings or part-number labels.

SUBMIT THIS FORM TO: info@yiyimeshbelt.com | WhatsApp: +86 134 5177 3742

Reliability built by automated manufacturing. · Quality starts from our own raw materials.

YIYI MESH BELT